

TOPCAT® K2

Drw.No.766 K2




Measurement

ITCA International Topcat
Class Association

Stand:01.02.2014

Wanten	1x19	4,0 ø	A=5962 mm +/- 10
Shrouds			
Trapezwanten	1x19	2,5 ø	B=5300 mm +/- 30
Trapez wires			
Stander	1x19	4,0 ø	C=230 mm +/- 50
Stander			
Vorstag	1x19	3,0 ø	D=4850 mm +/- 50
Forestay			
Fockfall	7x19	2,0 ø	4850 mm +/- 10
Jib halyard			
Gabelseil	1x19	4,0 ø	1005 mm +/- 5
Bridal wires			
Diamonds	1x19	4,0 ø	5470 mm + 20

optional: shockcord

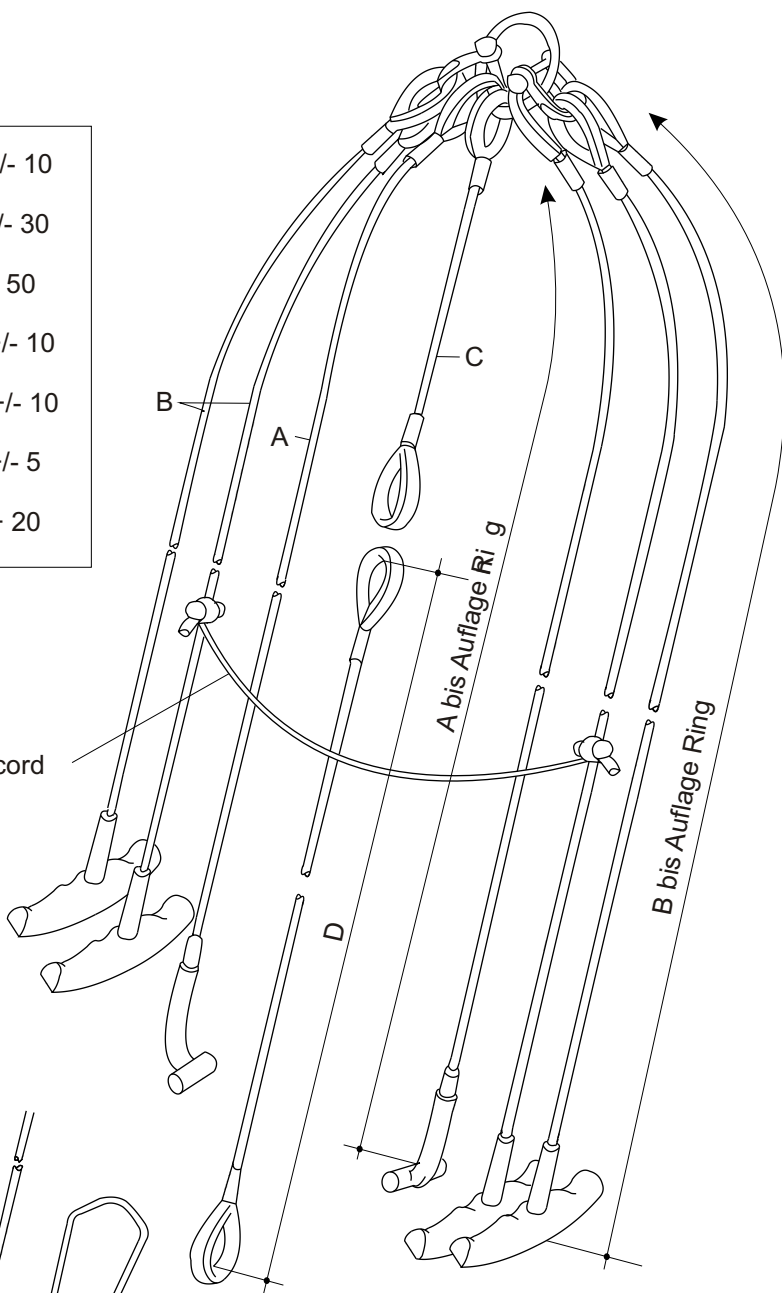

Optional:
Führung Trapezgummi
durch Vorderbeam
bei Verbleib eines
Sicherungselementes
am Püttingeisen

